

# Nasiff CardioCard®

PC BASED RESTING VET ECG SYSTEM

Portable  
Convenient  
**Affordable**  
Simple

For  
**Veterinarians**  
EMR  
**Connectivity**  
Built-in Networking  
**Unlimited Database**



*(laptop sold separately)*



## CardioResting™ Veterinary ECG — *we care about you and your patients*

Nasiff Associates, Inc. is the **FIRST** and continues to take the lead in PC-Based Resting ECG Systems. A true 12-lead interpretive ECG. Performing fast testing and managing them easily with you at the point-of-care.

- Performs ECG tests on PC/laptops, MAC (PC/laptops) and mobile devices. (**WINDOWS TABLETS, Android cell phones and tablets**)
- Cardio Universal EMR Interface™ - pdf, bidirectional Dicom, bidirectional HL7 and all standard interfaces...
- Cardio Patient Data Management™ System
- Built-In Networking
- Unlimited Patient Database
- Legendary quality, excellent customer support and training
- Reliable, user-friendly, compact and durable devices
- Feature rich at the best price
- Advanced security features with password options
- Made in USA
- FDA Clearance since 1990



**Nasiff Associates, Inc.**  
leading patient care


# Nasiff CardioCard®

PC BASED RESTING VET ECG SYSTEM



## SPECIFICATIONS

CONNECTION WITH PC	USB or Wireless connection
POWER SUPPLY	USB DC 5v or two AA batteries
POWER CONSUMPTION	< 200mA from USB or batteries
COMPARISONS	ECG/EKG serial historical comparisons
ECG MEASUREMENT RESOLUTIONS	2-4 msec, 1.22uV at 10mm/mV gain
HEART RATE RANGE	30-300bpm
LEADS	Standard 12- lead
LEAD LEAKAGE	< 10uA
ACQUISITION MODE	Simultaneous interpretive 12- lead acquisition
SAMPLING RATE	12- lead sampling rate 250-1000Hz
A/D RATE	1kHz
TIME BASE	12.5, 25 and 50 mm/sec
DYNAMIC RANGE	± 5 mV
FREQUENCY RESPONSE	0.05 to 150 Hz (higher available)
GAINS	2.5, 5, 10, 10/5, 20, 40 mm/mV
INPUT IMPEDANCE	>10 <sup>12</sup> ohms
SYSTEM NOISE	<40 uV RTI
ECG INTERPRETATION CLASSES	MIs, blocks, enlargements, axis and AFib
FILTERS	AC, baseline, muscle artifact
CMRR	>120 dB
NETWORKING	Built-in
MEASUREMENTS	HR with global measurements, complete interval values and ST information
DIMENSIONS	2.75" W x 1.25" D x 4.87" H (6.985 cm x 3.175 cm x 12.364 cm)
WEIGHT	0.26 lb (0.12 kg)
PC REQUIREMENTS	Tablet/Laptop/Desktop PC, Intel Compatible, 4GB RAM, 40GB HD, WINDOWS XP through WINDOWS 7, 8, 10 and MAC's with Boot Camp, Dual Boot,VMware Fusion or Parallels
WARRANTY	Two-year limited manufacturer's warranty, support and training

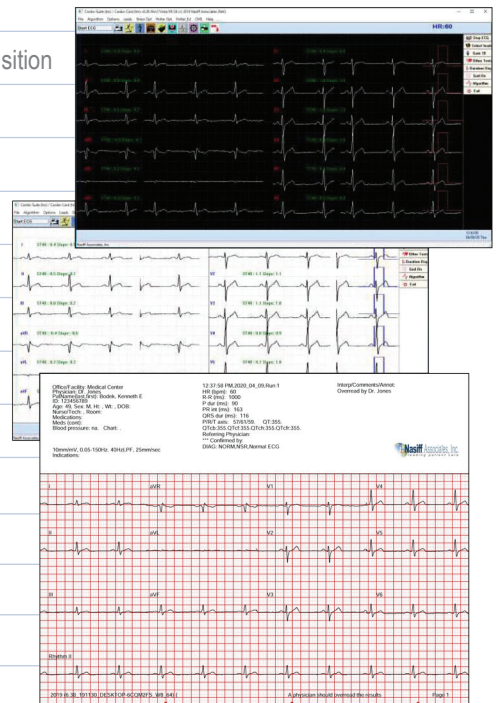

**ORDERING INFORMATION** CardioResting Vet System — CC-ECG1 V, CC-ECG1 V BT **CPT CODE 93000** (additional codes: 93005; 93010)

FOR MORE INFORMATION CONTACT:

Nasiff Associates, Inc. 841-1 County Route 37, Central Square, NY 13036  
 phone: 315.676.2346 • fax: 315.676.4711 • toll-free: 866.NASIFFA (866.627.4332)  
 tech support: 315.676.2346 • email: sales@nasiff.com • web: www.nasiff.com



USA FDA Clearance since 1989



Veteran Owned  
 Made in USA

